
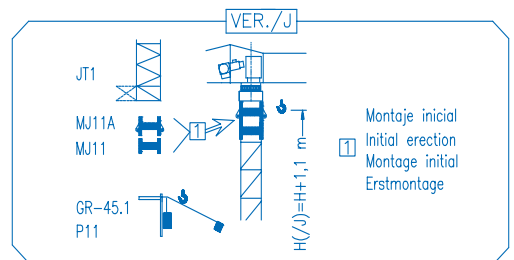
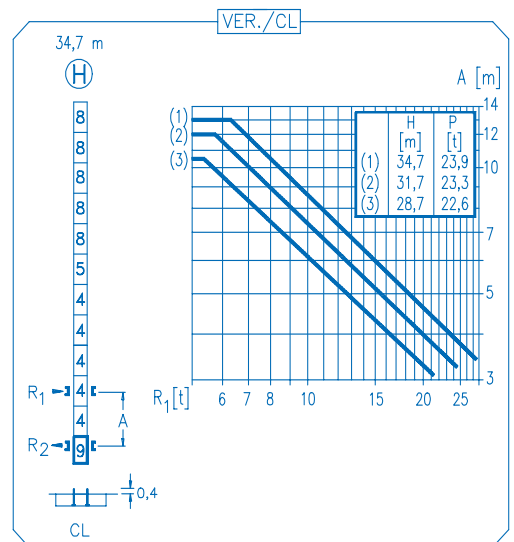


R	R(Cmax)	Cmax	20,0	22,5	25,0	27,5	30,0	32,5	35,0	m
35,0	16,1 m	2500	1950	1700	1500	1340	1210	1100	1000	kg
			1870	1620	1420	1250	1110	1000	900	
32,5	16,1 m	2500	1950	1710	1510	1350	1210	1100	1000	kg
			1880	1620	1420	1250	1120	1000		
30,0	17,1 m	2500	2090	1820	1610	1440	1300			kg
			2010	1740	1520	1340	1200			
27,5	17,6 m	2500	2170	1890	1680	1500				kg
			2080	1800	1580	1400				
25,0	17,8 m	2500	2200	1920	1700					kg
			2110	1820	1600					
22,5	17,7 m	2500	2180	1900						kg
			2080	1800						
20,0	17,9 m	2500	2200							kg
			2100							

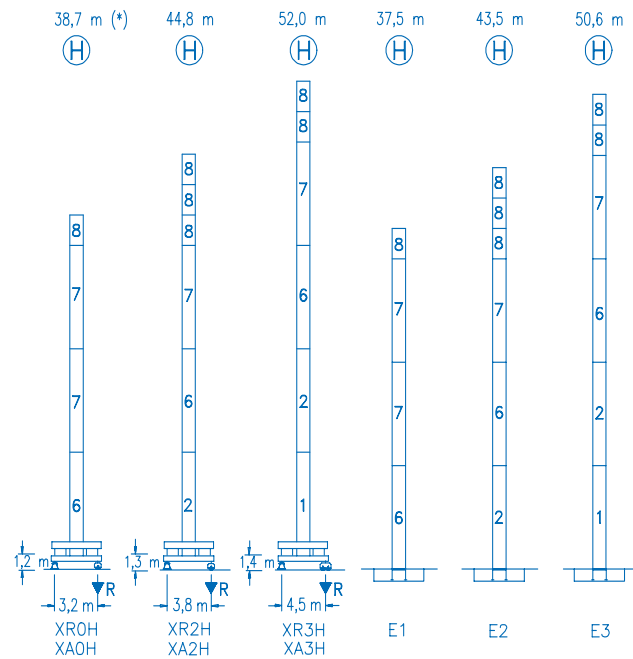

(*) SIN CAB. - CAB. NO. - SANS CAB. - KAB. NEIN.

R. máx.	En servicio In operation En service In Betrieb	XR0H 37,8 t XR2H 42,2 t XR3H 44,7 t
---------	---	---

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	XR0H 58,4 t XR2H 71,9 t XR3H 80,1 t
---------	---	---

CS2-1.9

1,9 kW

16 m/min
48 m/min

CFU-2.2

2,2 kW

0 ⇄ 80 m/min

GR-6.5

65 Nm

0 ⇄ 0,8 rpm

TS2-3.0	TS2-4.5	TS2-5.5
2x30 Nm	2x45 Nm	2x55 Nm
0 ⇄ 20 m/min		
XR0H	XR2H	XR3H

250 m

ES3-18-12

18 kW

	I	II	III
m/min	8	32	64
kg	2500	2500	1300
m/min	4	16	32
kg	5000	5000	2600

250 m

ES3-13-12

13,2 kW

	I	II	III
m/min	6	24	48
kg	2500	2500	1300
m/min	3	12	24
kg	5000	5000	2600

250 m

EFU2-18-12

18 kW

250 m

EFU2-11-12

11 kW

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	---

Opcional Optional En option Kaufoption	*
---	----------